

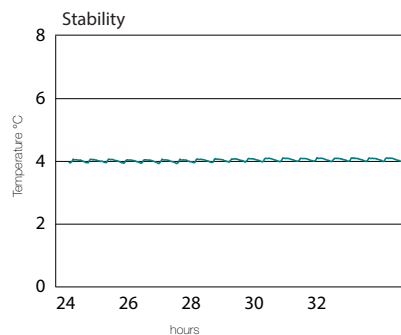
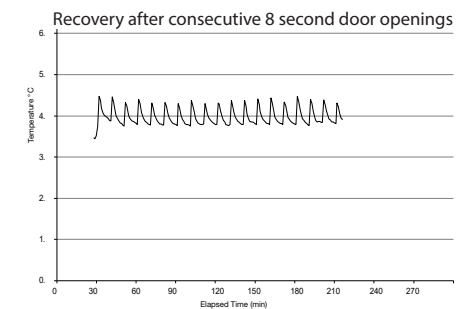
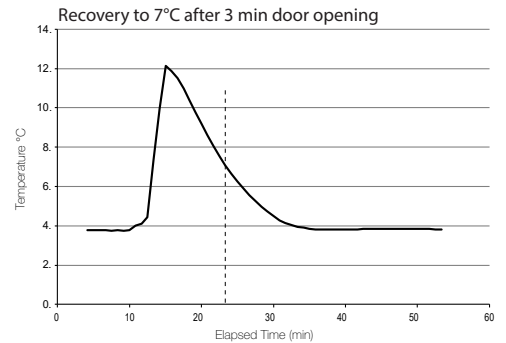


Application, Rating, & Electrical Data	
Application	High-performance storage of medical and scientific products
Storage Volume	5.3 cu ft (150 L)
Temperature Range	+2°C to +10°C
Set Point	5°C
Electrical Power	115V 60Hz 220-240V 50/60Hz
Maximum Current	1.4A 0.85A
Building Supply Rating	15A dedicated ground circuit
Power Plug/Power Cord Length	NEMA 5-15 hospital-grade 115V 60Hz, 8 to 10 ft (2.4-3.0m) CEE 7/7 (Schuko) 230V 50Hz, 8 to 10 ft (2.4-3.0m) NEMA 6-15 hospital-grade 230V 60Hz, 8 to 10 ft (2.4-3.0m)
Certification/Agency Listing	QPS (Certified to UL and CSA Standards) IEC/UL61010-2-011 (Dec 2016)
Energy Star	Yes
ADA Compliant	Yes, fits under standard 36" high ADA compliant countertop
Indoor/Outdoor Use	Indoor Use Only
Application Environment	Non-corrosive, non-flammable, non-explosive
Ambient Operating Temperature	15°C to 32°C 59°F to 90°F
Refrigeration	
Refrigeration System	VCC compressor-based, forced-air hydrocarbon
Compressor	Hermetic, variable speed (VCC). Rated speed range: 1300-4000 rpm
Condenser Type	Air-cooled fin and tube, sealed
Expansion Device	Cap tube
Evaporator Type	Direct expansion with forced-circulation fin and tube
Defrost Method	Automatic
Refrigerant	R600a, Isobutane, EPA SNAP compliant
Controller / Configuration Settings	
User Interface	i.C3® color touchscreen, door-mounted, 7in 177mm
Power Switch	On/Off
Controller Type	Microprocessor with touchscreen input & display, includes USB port for data retrieval
Security	Lockable door, password protected settings, PIN access via optional access control
Control Sensor	RTD, stainless steel
Communication Ports	USB, Ethernet, Remote alarm contacts
Power Failure Alarm	Yes
High/Low Alarms - Tests	Yes, fully adjustable, automatic (Peltier) testing
Door Ajar Alarm	Yes, fully adjustable
Condenser Temperature Alarm	Yes, fully adjustable
Min/Max Temperature	Yes, display and reset
Event Log	Yes, all alarms, door openings, download via USB
Temperature Log	Yes, download via USB
Access Log	Yes, with optional access control, download via USB
Interactive Temperature Graph	Yes
Temperature Monitoring Ballast	Yes, 4 oz bottle with screw cap, solid monitoring ballast optional

Performance Characteristics (normal operating conditions)	
Uniformity °C	+/-1.0
Recovery to 7°C after 3 min door opening min	13
Stability °C	0.72
Energy consumption kWh/day	1.37
Noise emission dB	42
Heat rejection BTU/hr	460
Pull-down time to 4°C min	37

All performance data from 5 cu ft refrigerator, 24.8 ambient, 4.0°C

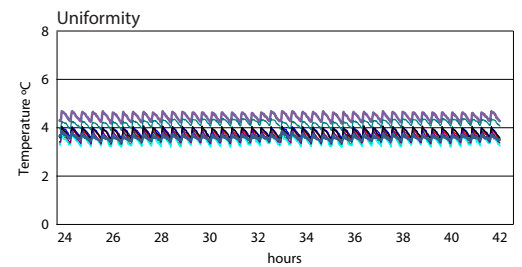


Location of test probes

Typical Temperature Map


5 cu ft. Temperature Map (°C)

	1FR	1FL	1BR	1BL	2FR	2FL	2BR	2BL
Avg	3.9	4.0	3.5	3.6	3.9	4.3	3.8	4.4
Max	4.3	4.5	4.2	4.2	4.3	4.5	4.3	4.7
Min	3.5	3.7	3.1	3.2	3.5	4.0	3.4	4.1


Dimensions and Construction	
Interior (w x h x d)	19.5 x 19.9 x 22.8 in 496 x 505 x 580 mm
Exterior (w x h x d)	24 x 31.5 x 26.7 in 610 x 798 x 678 mm
Overall Exterior (w x h x d)	24 x 31.9 x 28.1 in 610 x 809 x 714 mm (Inc. leveling feet, door handle, user interface)
Insulation	Sustainable, US EPA, SNAP and GRAS approved foam
Exterior/Interior Finish	Bacteria-resistant powder-coating
Door	Solid, field-reversible
Access Port	Rear access port
Interior Storage	2 ventilated drawers, adjustable 16.7 x 20.6 in 424 x 523 mm, 100 lb 46 kg max capacity/drawer
Leveling Feet	Yes, adjustable
Integrated Access Control	Optional - electromagnetic-lock via i.C3® user interface PIN
Net Weight	182 lb 83 kg
Shipping Weight	243 lb 111 kg
Clearance Requirements	Minimum 3 in (76 mm) behind unit for clearance and feature access
Options Accessories	Glass door, LED light, Integrated access control, Stainless steel exterior/interior, TCR2 chart recorder, Swivel, locking casters, Solid ballast, Remote alarms, Stacking kit, Floor and Wall bracket kit, Storage trays, Pedestal, Locking drawer, Certificate of Calibration, Temperature Validation, Validation Guides (IQ/OQ), Extended Warranty

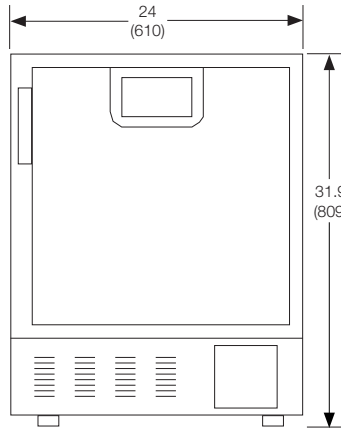


FRONT VIEW

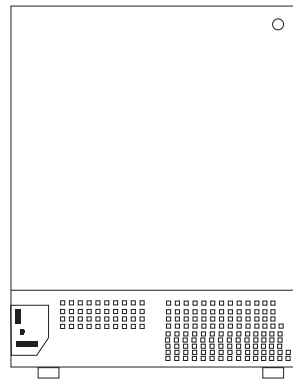

BACK VIEW

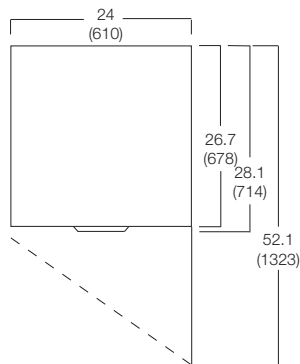

TOP VIEW

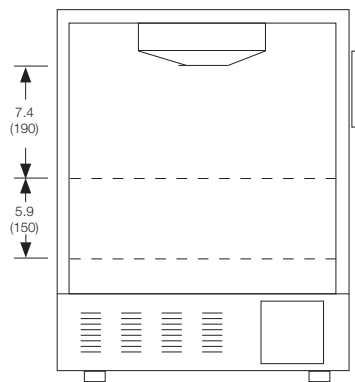

INTERIOR
VERTICAL SPACING